

17" TFT LCD COLOR MONITOR USER'S MANUAL

CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Contents

Please read this user's manual in detail and use the set properly.

Caution	3
Name And Function Of Each Part	4
Picture Control	5
Function	6
Connections	7
Specifications	8

2



Caution

Please read this page carefully and keep the following instructions for your safety from any accidents or danger. Please leave this user's manual near at your hand after read this. There are two kinds of alarm signs as follows.



WARNING The possibility of fatal injury or death if against instructions.



CAUTION The possibility of light injury or the damage to the device if against instructions.

WARNING

- Do not disassembly or remodel the device without a qualified engineer.
- Do not install the device near the heat sources or the direct lay of light to avoid fire occurs.
- Do not put or drop the inflammables in the device to avoid firing or electric shock.
- Keep remote control battery away from children to prevent from swallowing it.
- Please power off and contact with our help desk immediately when gets smoke or bad smell from the device.

CAUTION


- Please watch the monitor from proper distance to protect your eyes.
- Do not use the device without starting your car to avoid electric discharge.
- Please install the device at the place where is well ventilated.

3




Name And Function Of Each Part

Monitor Set

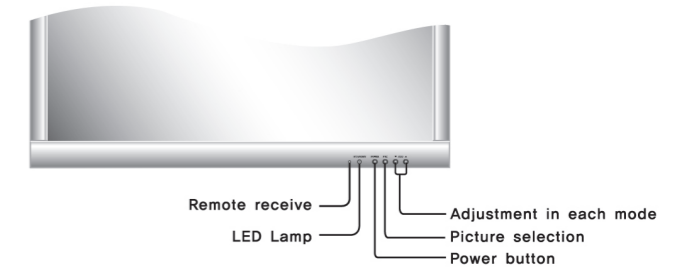

Remote Control

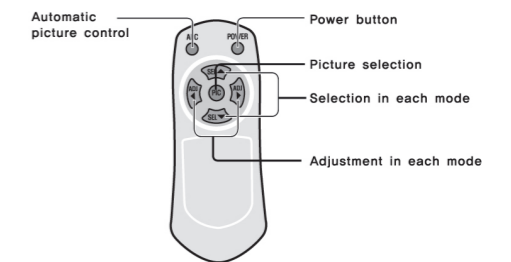


4




Picture Control

Automatic Picture Control




- Press the APC button of the remote control.
- Whenever you press APC button, Picture condition is to be changed as follows.

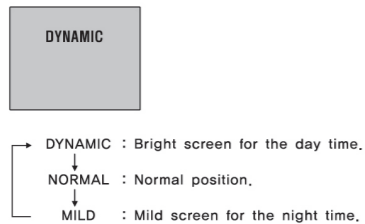

Manual Picture Control

- Make picture displayed by pressing PIC button.




- Make the menu you want by pressing SEL \blacktriangledown or \blacktriangle button.
- Adjust the picture condition you want by pressing ADJ \blacktriangleleft or \blacktriangleright button.

5





Function


Input Function




- Make picture displayed by pressing PIC button.
- Press SEL \blacktriangledown or \blacktriangle button and then adjust INPUT to be changed cyan color.
- Press ADJ \blacktriangleleft or \blacktriangleright and then choose AV1 or AV2 mode.




System Choose Function




- Make picture displayed by pressing PIC button.
- Press SEL \blacktriangledown or \blacktriangle button and then adjust SYSTEM to be changed cyan color.
- Press ADJ \blacktriangleleft or \blacktriangleright and then choose NTSC or PAL mode.



Reset Function



- Make picture displayed by pressing PIC button.
- Press SEL \blacktriangledown or \blacktriangle button and then adjust RESET to be changed cyan color.
- Press ADJ \blacktriangleleft or \blacktriangleright and then replace with the factory default values.




6



Connections

Connections

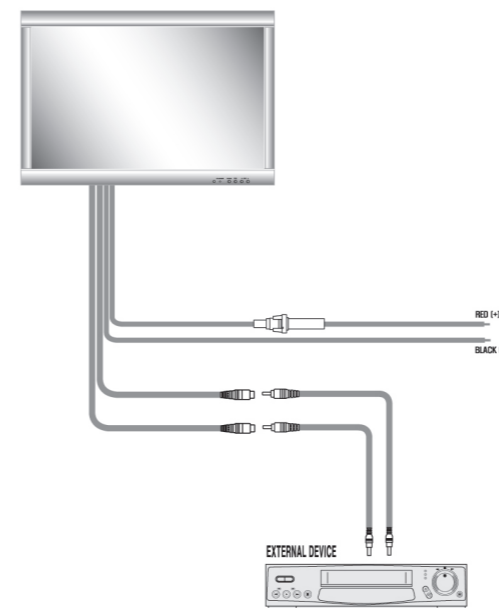

7



Specifications

Power Requirements	DC 12V
Aspect Ratio	16 : 9
Resolution Pixel	1280 X 768
Brightness Factor	450 cd/m ²
Broadcast Mode	NTSC / PAL
Screen Size	17" TFT LCD
Remote Control	YES
Dimensions	405(W) X 275(H) X 37(D) mm

Note : This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

8