

OWNER'S MANUAL

7" WIDE SCREEN TFT-LCD COLOR MONITOR



46M07POAC15-DY-0000

CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CONTENTS

Thank you for purchasing one of our products!
Please read the entire users manual prior to installing this product!

CAUTION	4
NAME AND FUNCTION OF EACH PARTS	6
Unit	6
Remote Control	6
PICTURE CONTROL	7
Auto Picture Control	7
Manual Picture Control	7
Screen Mode Control	8
EXTRA FUNCTIONS	9
Power Mode	9
CONNECTION DIAGRAM	10
SPECIFICATIONS	11

A grade screens constitute no more than 3 missing pixels.

CAUTION

Please read and observe all warnings and instructions in this owner's manual and those marked on the unit. Retain this booklet for future reference.

There are two kinds of alarm symbols as follows:



WARNING

The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



CAUTION

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

WARNING



The driver should never operate these products while the vehicle is in motion!



Installation of all TV monitors must be out of the driver's field of vision!



Do not try and service these products yourself, seek only a qualified service center or factory service center.



Be careful not to drop or apply undue pressure to the front panel of your video monitor. If the screen cracks due to misuse your warranty will be void!



Make sure to keep products away from heater ducts or vents and out of direct sunlight. Do not mount forward of the driver's shoulders.



Be careful not to overload your cigarette lighter plug by adding more than one device at a time.



Use extra caution with any liquids in your car. If you or your child spill any liquid on these products, pull your vehicle to the roadside and turn the key off to disconnect or wipe the products with a towel. Do not operate the equipment until all liquids have either evaporated or you have had the monitor inspected at a service center by a qualified technician. Severe harm or death can occur!



Use only a damp cloth to clean the screen and use only purified water on the cloth, wring out all excess water prior to wiping the screen. Do not use any cleaners or chemicals to clean the screen. In most cases a dry cloth will do!



Do not mount the product where it will obstruct the deployment of the airbag or in an area where it would affect the vehicular control. Also be careful to avoid mounting the product where it can become hazardous during sudden stops or in the event of an accident.

CAUTION

CAUTION



Quality installations are best performed by qualified and certified installers.





Watching the monitor for an extended period of time without the engine running may deplete the vehicle's battery charge.



This product is designed for operation with a 12 Volt DC, negative ground vehicle. It is not suitable for operation under other conditions or voltages.


Check Point

1. The operating temperature of this product is limited to $-4^{\circ}\text{F} \sim +176^{\circ}\text{F}$. Your vehicle can reach temperatures up to 212°F in the summertime.
2. From time to time when your vehicle extremely hot or cold you must allow time for your air conditioner or heater to cool or heat the vehicle to operating temperatures to return to normal operating ranges. Your monitor will return to its normal functions when these operating ranges are achieved.
3. Your optimum picture quality is achieved when you are directly in front of the monitor (± 30 degrees).




NAME AND FUNCTION OF EACH PARTS

Unit

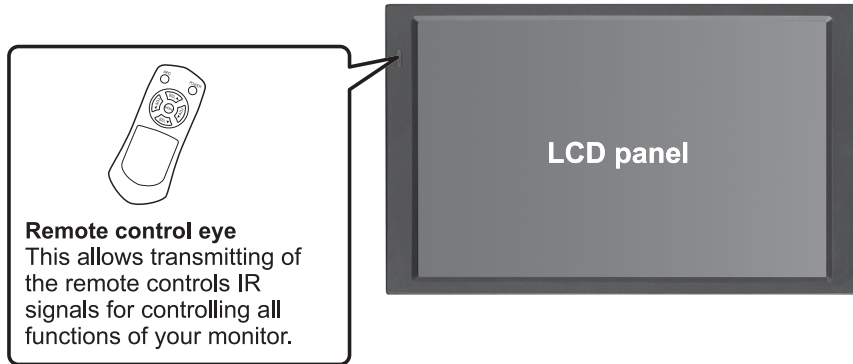


Remote Control

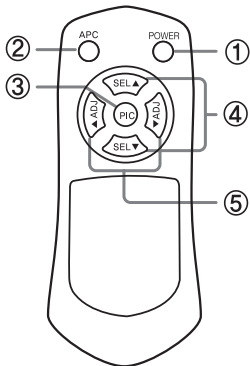


- ① **POWER**
Power button.
- ② **APC**
Auto picture control.
- ③ **PIC**
Picture control.
- ④ **SEL ▲/▼**
Selection in each mode.
- ⑤ **ADJ ◀/▶**
Mode adjustment.

PICTURE CONTROL

Auto Picture Control



Press this button to change picture mode.
When you press this **APC** button, Picture mode will be changed as follows;



Manual Picture Control

Contrast/Bright/Color/Tint selection.




1. Make Picture menu displayed by pressing **PIC** button.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



2. Make the menu you want to adjust by pressing **SEL ▲** or **SEL ▼** buttons.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



3. Adjust the picture condition you want by pressing **ADJ ◀** or **ADJ ▶** buttons.

PICTURE	
Contrast	90
Bright	70
Color	80
Tint	50
Screen	Wide
Power	Memory On

PICTURE CONTROL

Screen Mode Control

Adjust screen mode as your taste.




1. Make Picture menu displayed by pressing **PIC** button.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



2. Make the menu you want to adjust by pressing **SEL ▲** or **SEL ▼** buttons.



PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



3. Adjust the screen mode you want by pressing **ADJ ◀** or **ADJ ▶** buttons.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Normal
Power	Memory On



Wide		Normal	
<p>The screen will be magnified to the ratio of 16:9 on the left and right sides.</p>		<p>The screen will be the standard 4:3 ratio.</p>	

EXTRA FUNCTIONS

Power Mode




1. Make Picture menu displayed by pressing **PIC** button.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



2. Make the menu you want to adjust by pressing **SEL ▲** or **SEL ▼** buttons.


PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Wide
Power	Memory On



3. Adjust the screen mode you want by pressing **ADJ ◀** or **ADJ ▶** buttons.

PICTURE	
Contrast	90
Bright	80
Color	80
Tint	50
Screen	Normal
Power	Memory Off

CONNECTION DIAGRAM

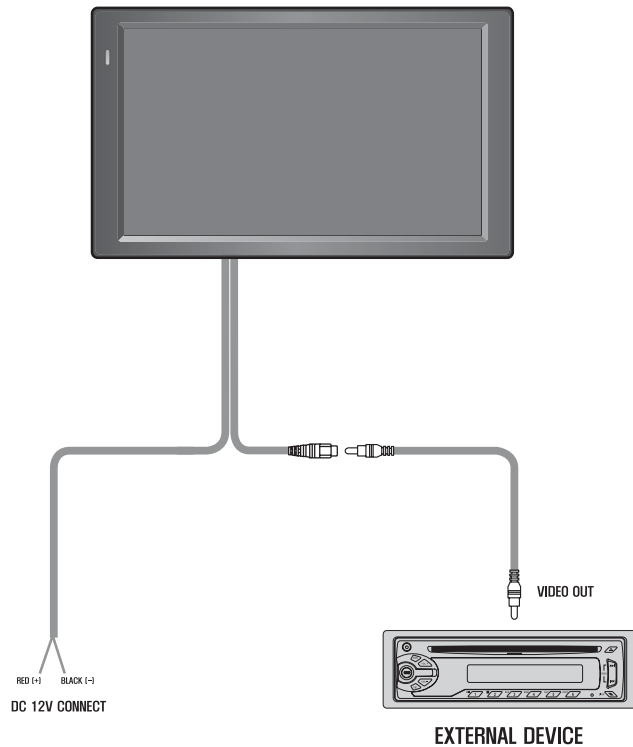

SPECIFICATIONS

Power Requirements	DC 12V
Screen Format	16:9
Resolution pixels	1440 x 234 dots / 480(RGB) x 234 Pixel
Broadcast Mode	NTSC / PAL
Screen Size	7" WIDE TFT-LCD
Remote Control	Yes
Dimension	(W) 7" x (H) 4.3" x (D) 0.8"

Note : This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.